




Hydraulic Rubber Hose

SAE 100R17

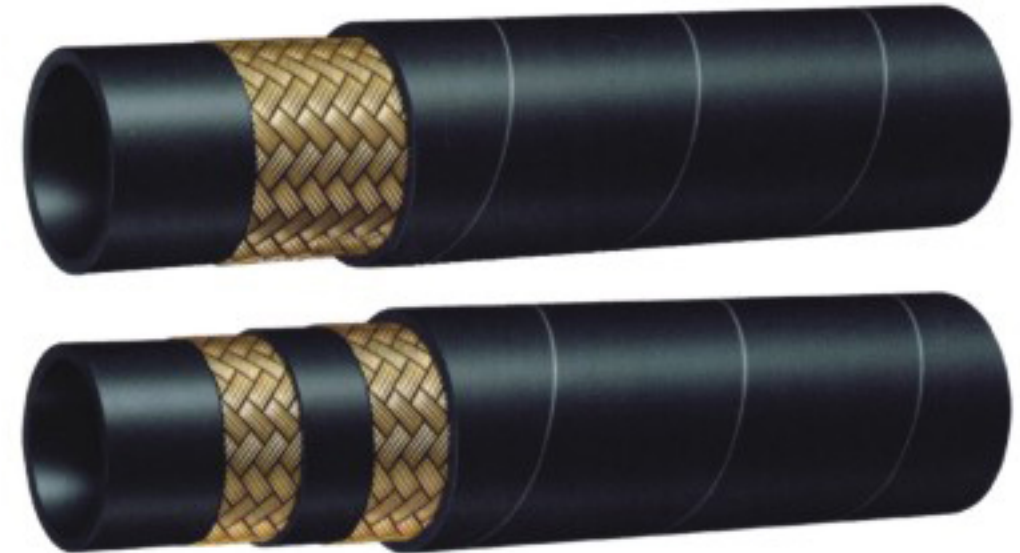

1层或2层钢丝编织橡胶软管

SINGLE OR DOUBLE WIRE BRAID REINFORCED HYDRAULIC RUBBER HOSE

- * **Application:** For delivery of petroleum base hydraulic fluids or water base liquids.
- * **Inner tube:** Seamless oil resistant synthetic rubber.
- * **Reinforcement:** 1 or 2 high tensile steel wire braid.
1 wire for sizes 1/4" , 3/8" ,1/2" ; 2 wires for sizes 5/8" , 3/4" ,1" .
- * **Outer cover:** Oil,weather and abrasion resistant synthetic rubber.
- * **Temperature Range:** -40°C ~ +100°C (-40°F ~ +212°F)
- * **Specifications:**

产品型号	规格 SIZE	内径 I.D	外径 O.D	工作压力 W.P		最小爆破压力 B.P		最小弯曲半径 Min Bend Radius	参考重量 Weight
Part Number	inch	mm	mm	bar	psi	bar	psi	mm	g/m
1 wire braid									
P04-R17	1/4"	6.3	12.5	210	3045	840	12180	50	290
P06-R17	3/8"	9.5	16.3	210	3045	840	12180	65	380
P08-R17	1/2"	12.7	20.7	210	3045	840	12180	90	500
2 wire braids									
P10-R17	5/8"	16.0	25.9	210	3045	840	12180	100	625
P12-R17	3/4"	19.0	30.4	210	3045	840	12180	120	780
P16-R17	1"	25.4	38.6	210	3045	840	12180	150	1080

杭州派舜橡塑有限公司
HANGZHOU PAISHUN RUBBER & PLASTIC CO., LTD